

CW-WZ-0026

2.4G External Antenna

Key Features

Frequency: 2.4G-2.5G

SMA Male Connector

External Rubber

Dimensions 28*10mm




1. Antenna Electrical Characteristics

Band (MHz)	
Frequency (MHz)	2.4G-2.5G
VSWR	2:1
Efficiency (%)	50.72%
Peak Gain (dBi)	3.89
Impedance (Ohm)	50
Polarisation	Vertical
Max. Input Power (W)	10
Connector Type	SMA male

2. Material and environmental characteristics

Material of PCB	N/A
Material of Plastic	TPEE
Cable Type	N/A
Connector Type	SMA male
Dimensions (mm)	28*10MM
Antenna color	Black
Operation Temperature	-40 to +80
Storage Temperature	-40 to +80
Antenna Storage life(year)	10
Substance Compliance	ROHS

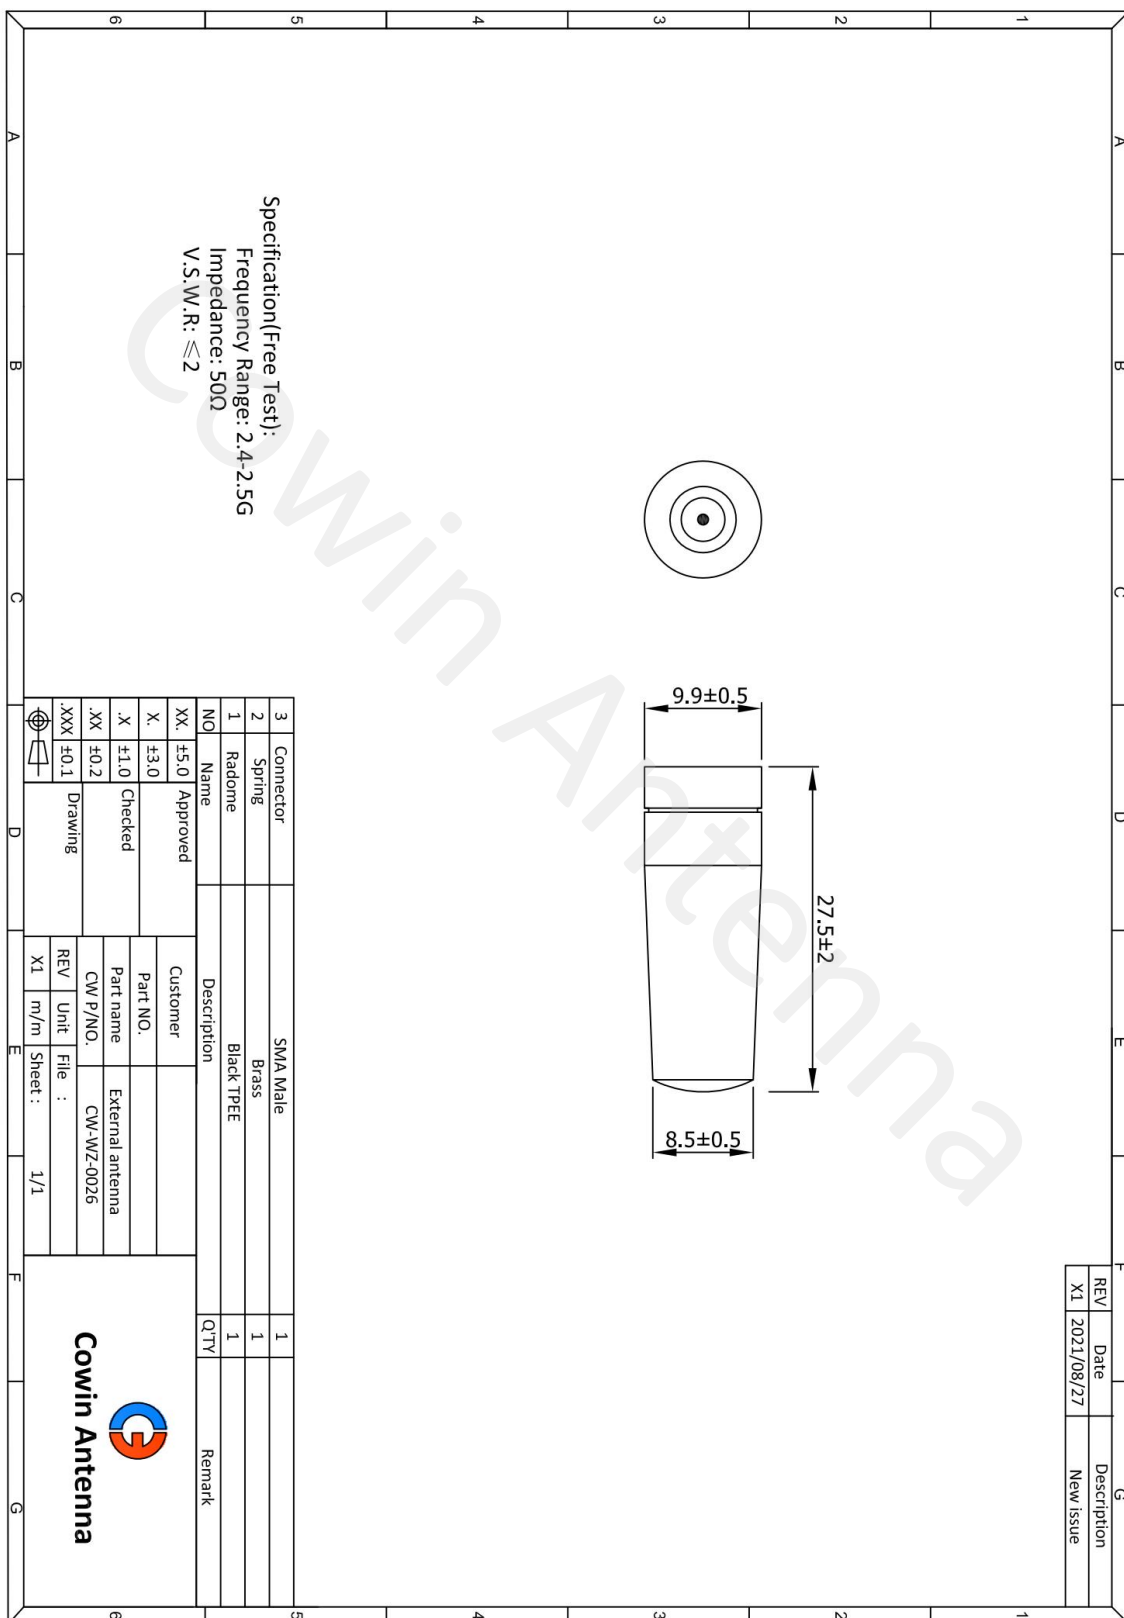

4. Antenna test parameters


Antenna Measurement Conditions:

Mounted on Ground Plane of 280 x 80 mm

Measured in Certified 3D Anechoic Chamber

The network analyzer is Agilent 5071c

The comprehensive tester is Agilent cmv500

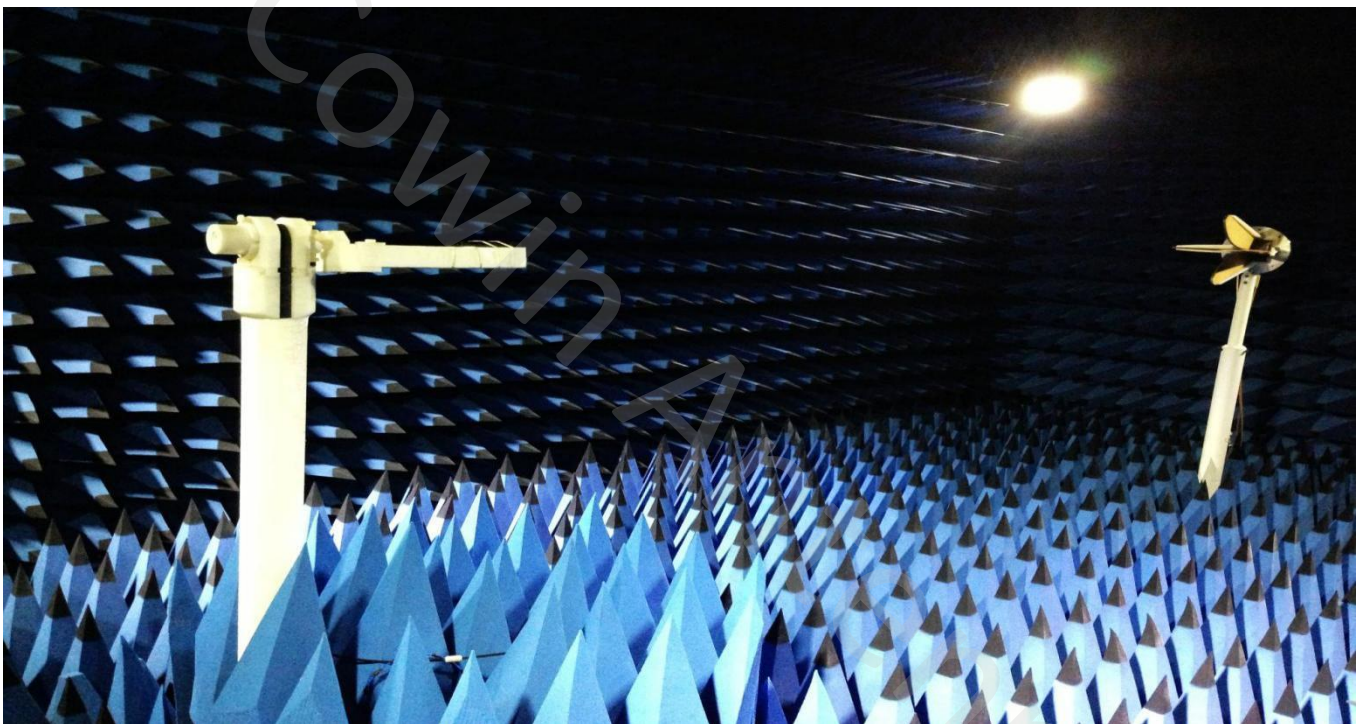


4.1 VSWR




8/24/2021, 9:06 PM


4.2 Efficiency

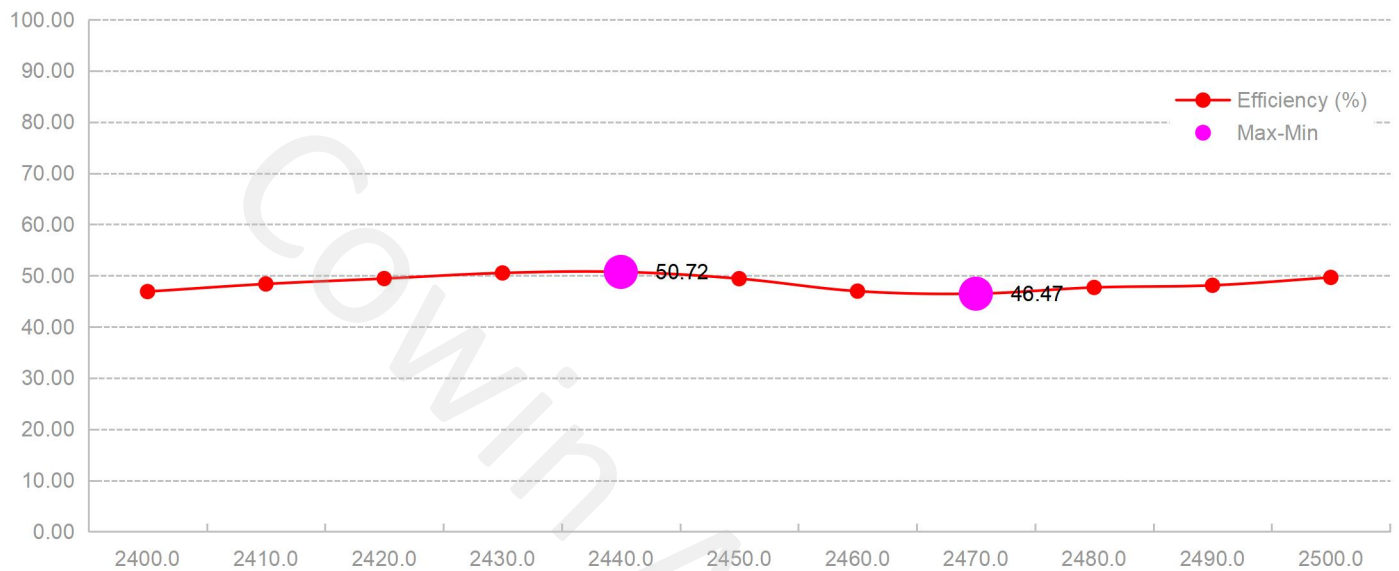

4.3 Peak gain

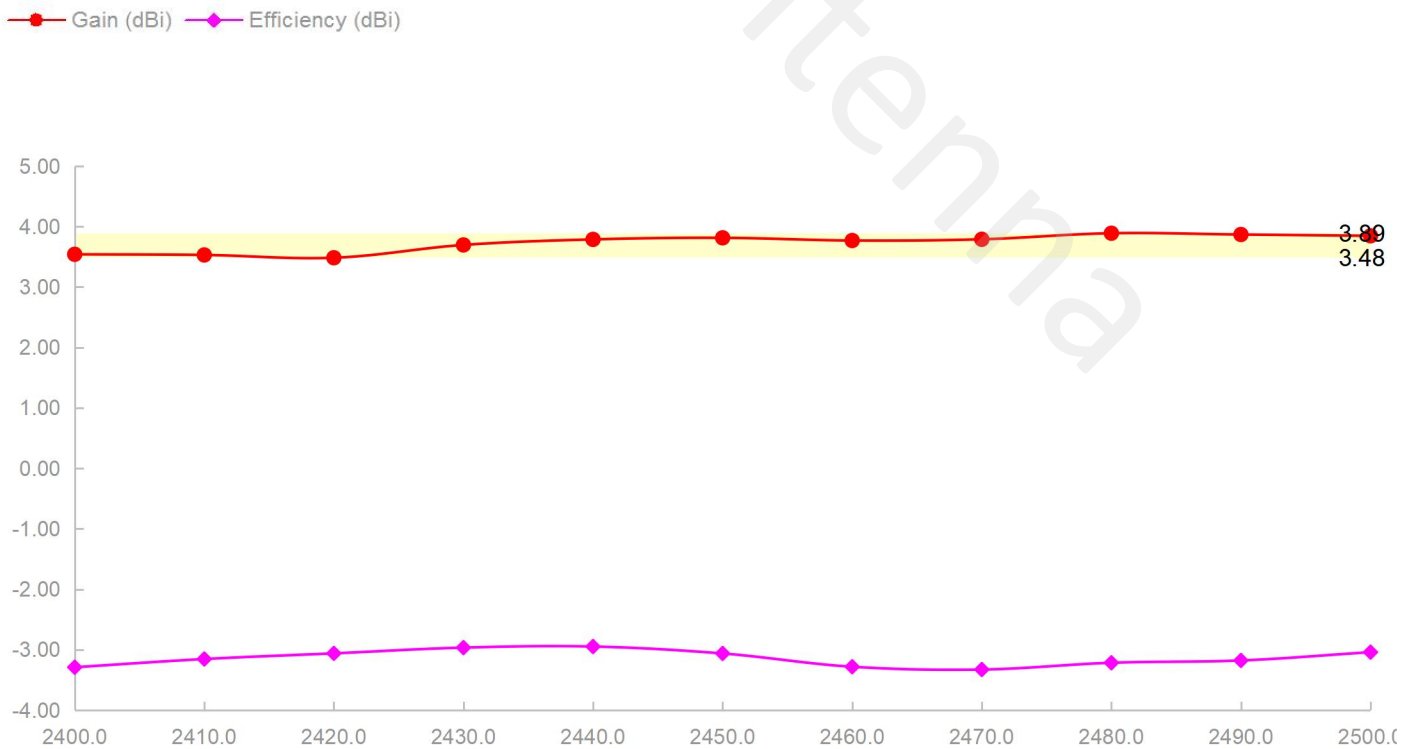


4.4 3D&2D Radiation Patterns

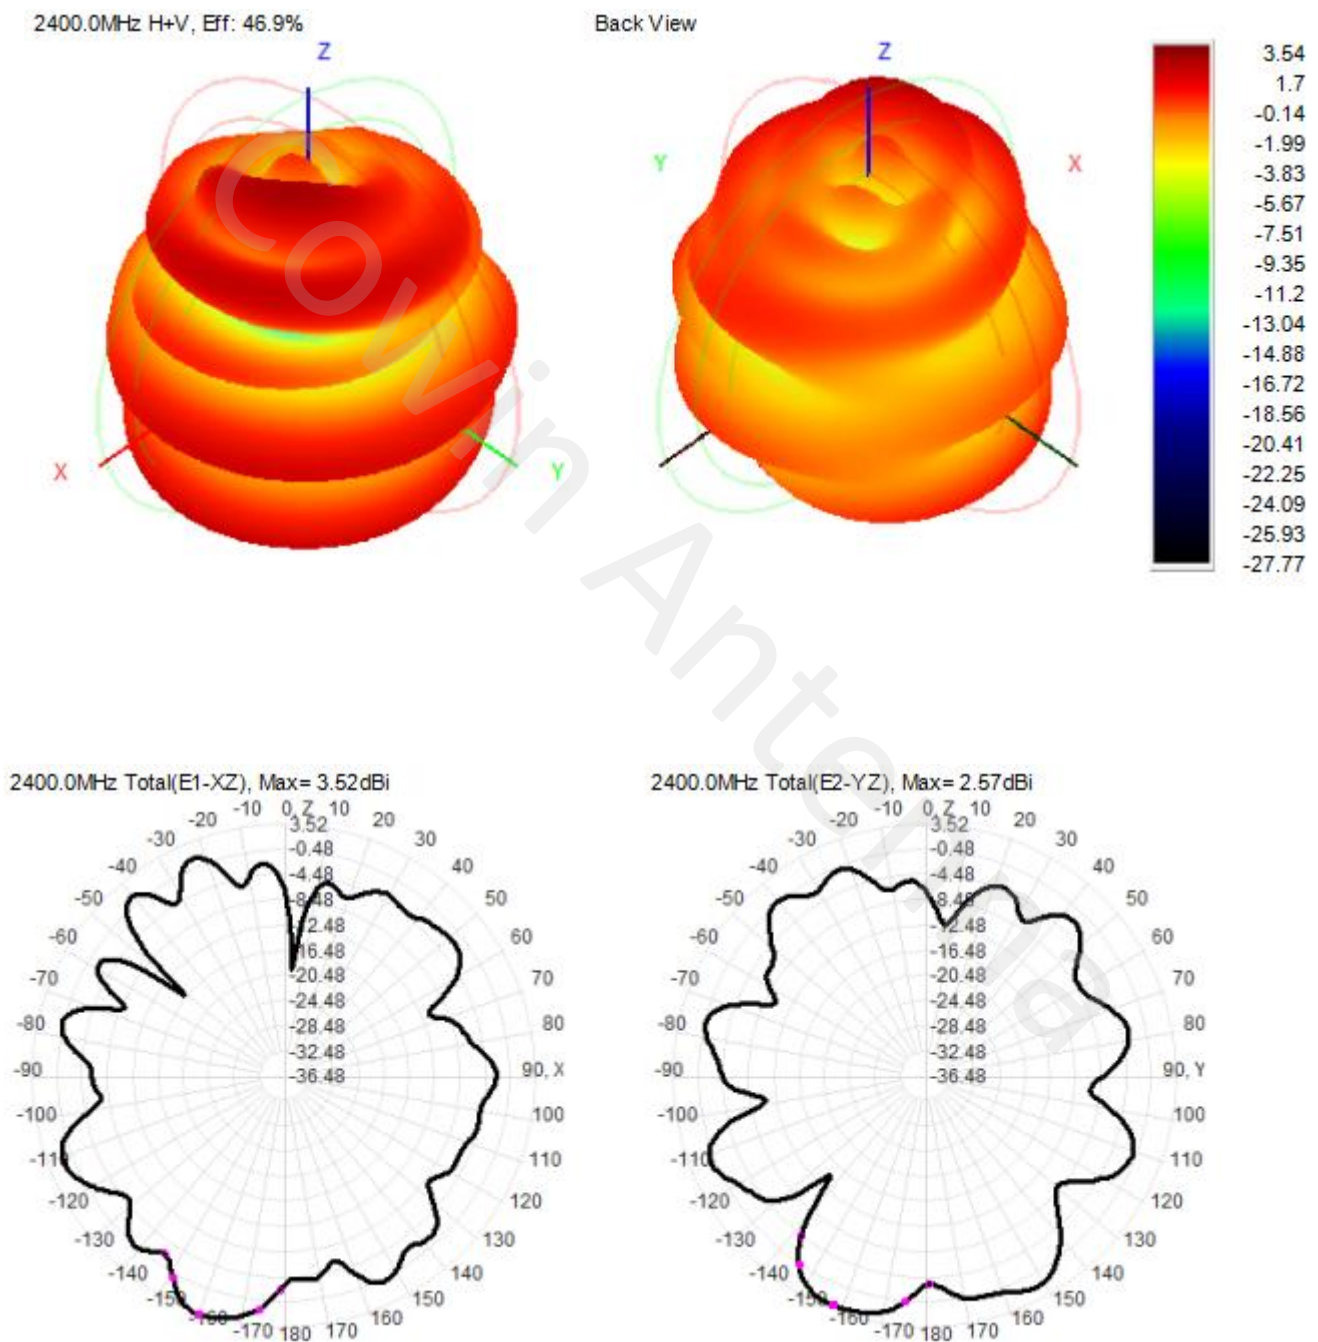


2450.0MHz H+V, Eff: 49.4%

Back View

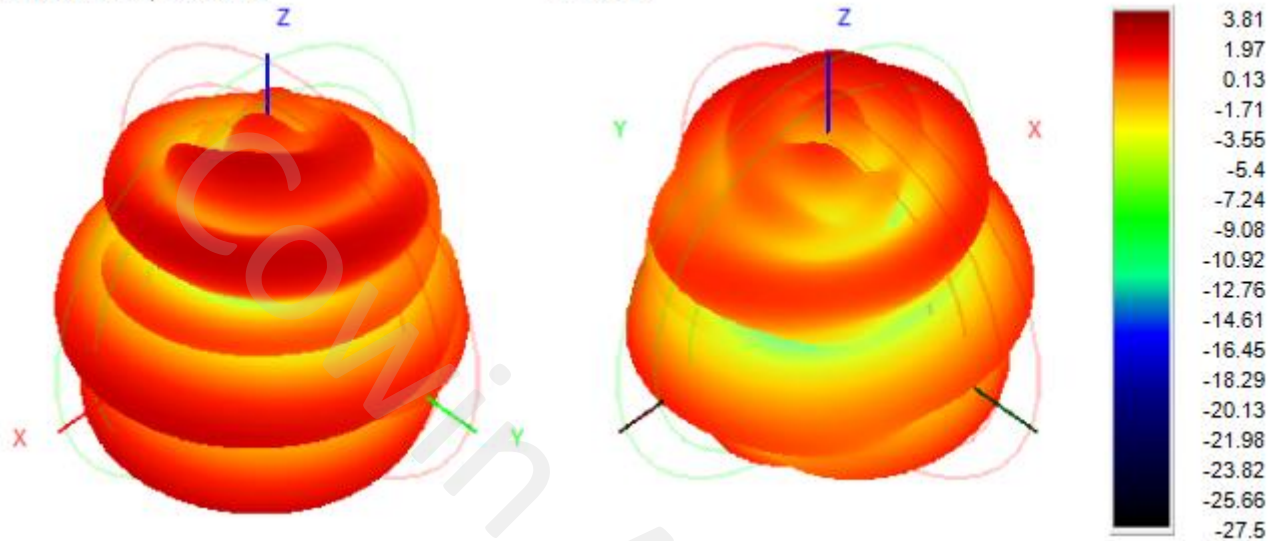


2450.0MHz Total(E1-XZ), Max= 3.39dBi



2450.0MHz Total(E2-YZ), Max= 3.00dBi

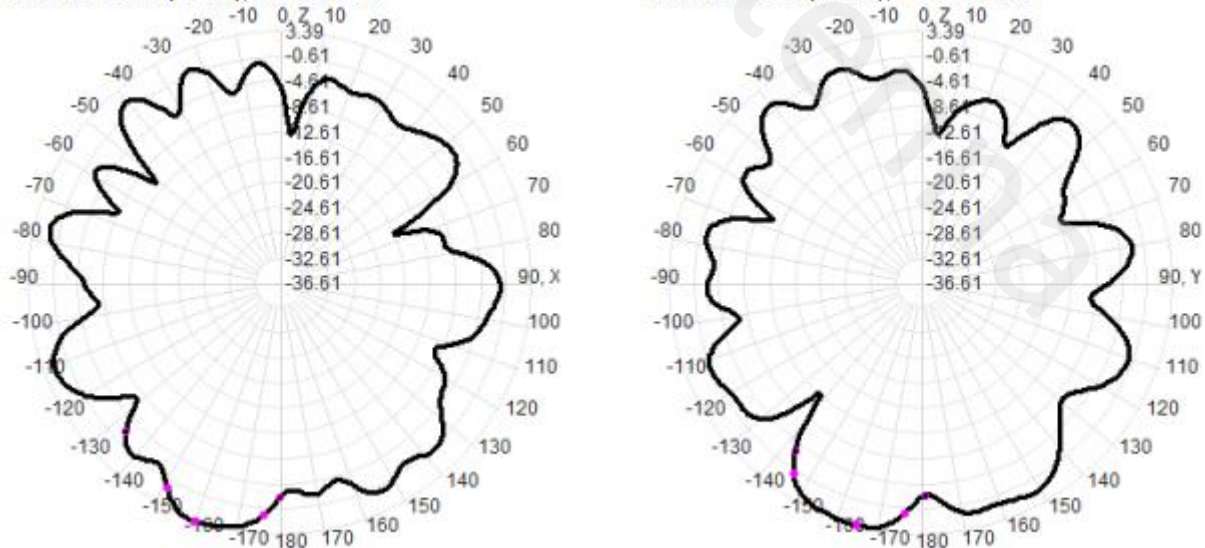


2500.0MHz H+V, Eff: 49.6%

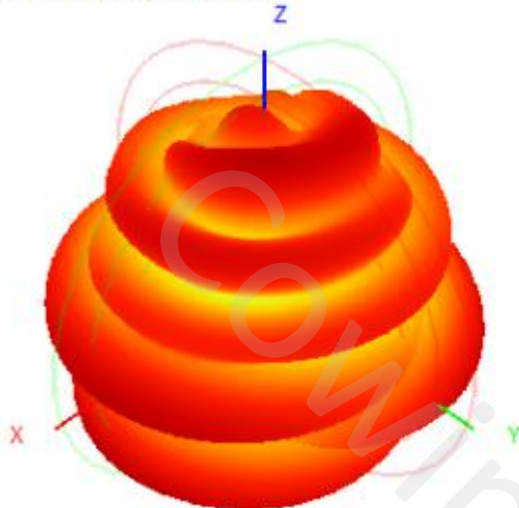

Back View

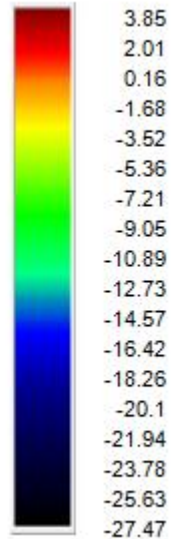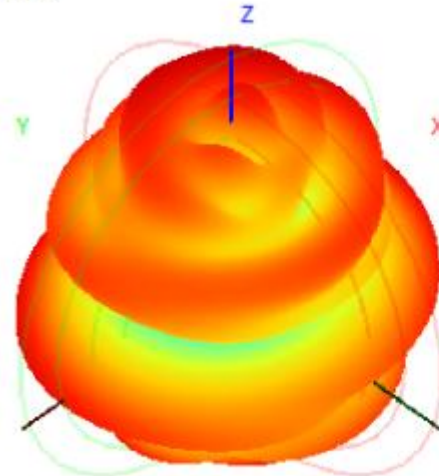

2500.0MHz Total(E1-XZ), Max= 3.00dBi

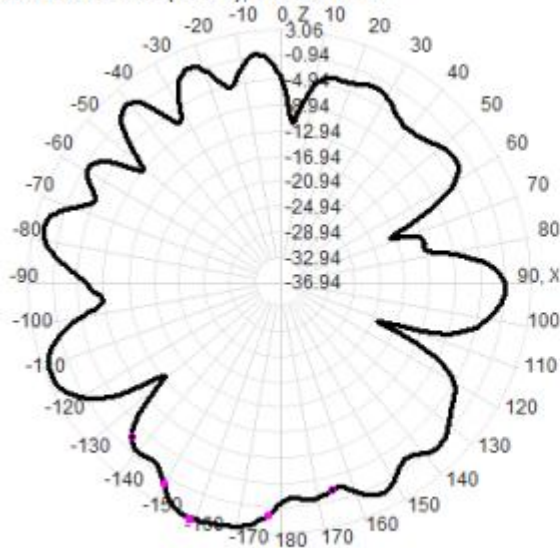

2500.0MHz Total(E2-YZ), Max= 3.06dBi

