

CW-WZ-0121

868/915MHZ External Antenna

Key Features

Frequency: 868/915MHZ

SMA Male Connector

External Rubber

Dimensions 50 mm




1. Antenna Electrical Characteristics

Band (MHz)	
Frequency (MHz)	868/915MHZ
VSWR	2.5
Efficiency (%)	54.35%
Peak Gain (dBi)	2.3
Impedance (Ohm)	50
Polarisation	Vertical
Max. Input Power (W)	10

2. Material and environmental characteristics

Inner structure	Spring
Material of Plastic	TPEE
Cable Type	N/A
Connector Type	SMA Male
Dimensions (mm)	50MM
Antenna color	Black
Operation Temperature	-40 to +80
Storage Temperature	-40 to +80
Antenna Storage life(year)	10
Substance Compliance	ROHS

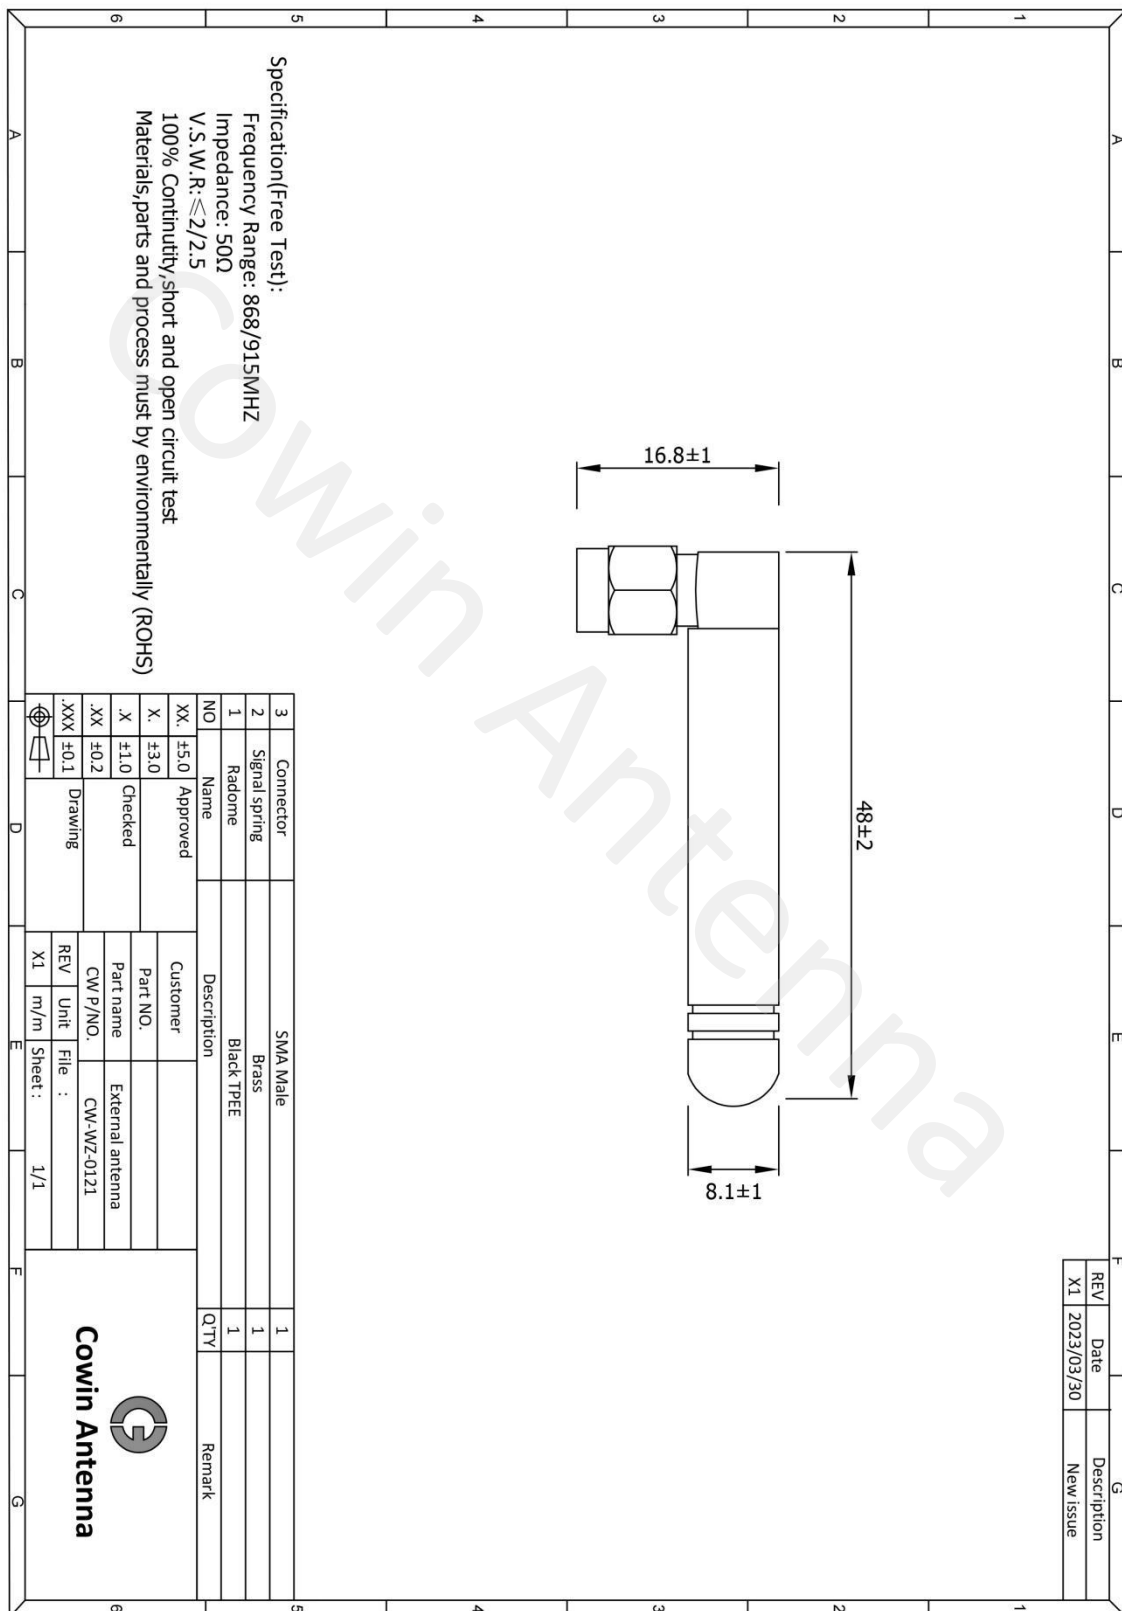

4. Antenna test parameters

Antenna Measurement Conditions:

Mounted on Ground Plane of 280 x 80 mm


Measured in Certified 3D Anechoic Chamber

The network analyzer is Agilent 5071c

The comprehensive tester is Agilent cmv500




4.1 VSWR

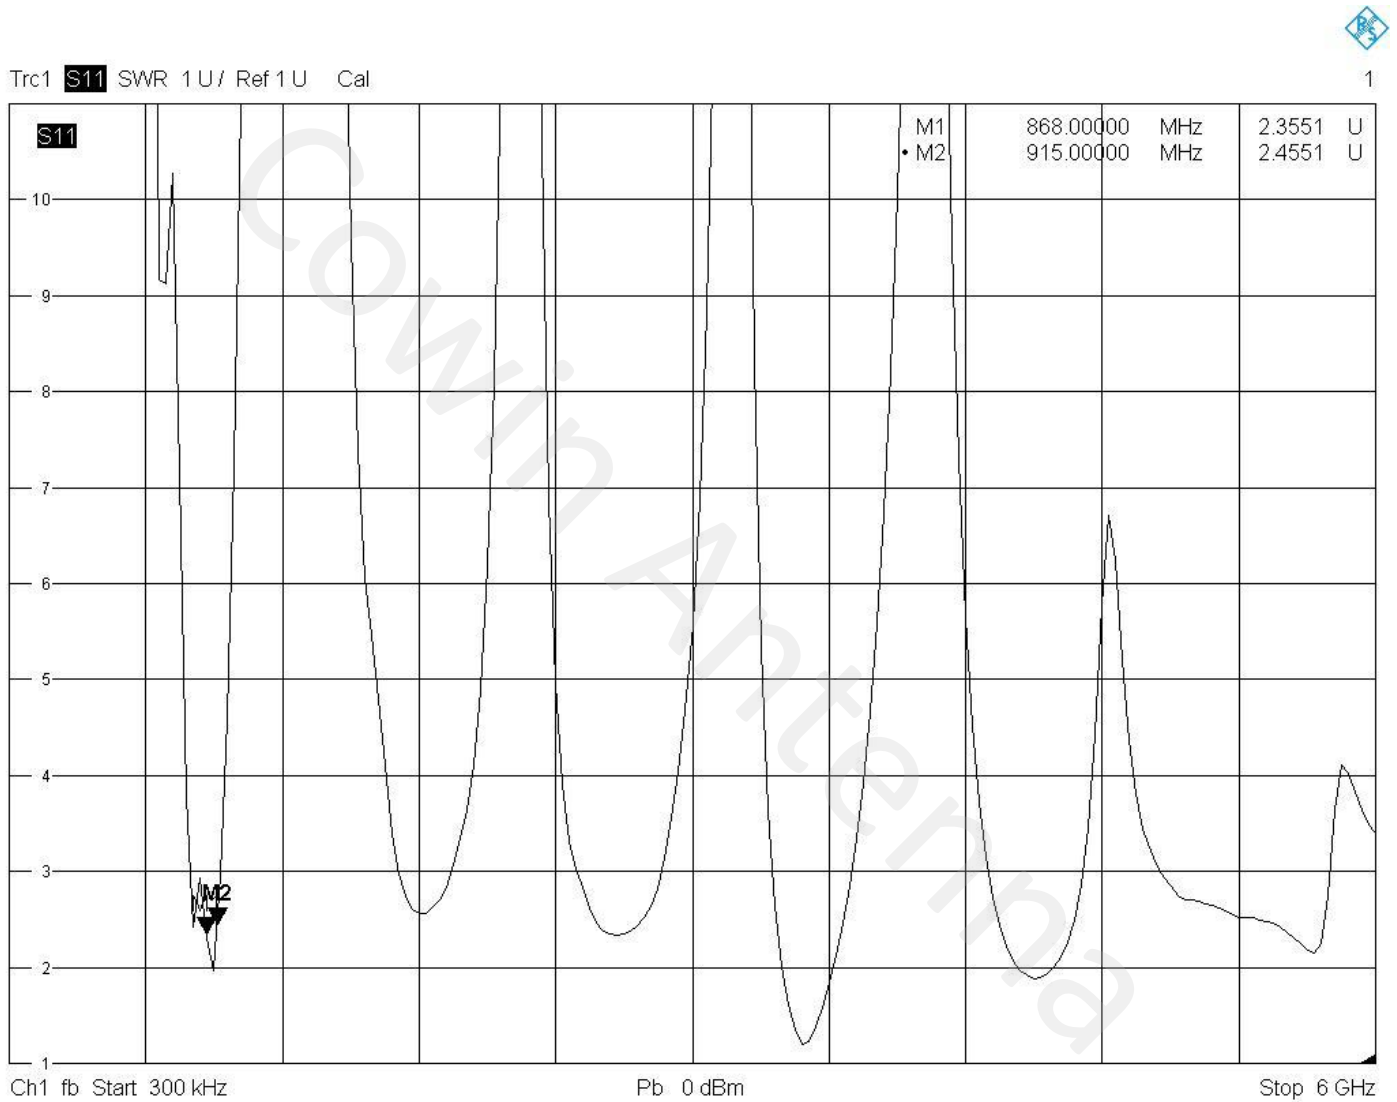


4/11/2023, 12:35 AM

4.2 Efficiency

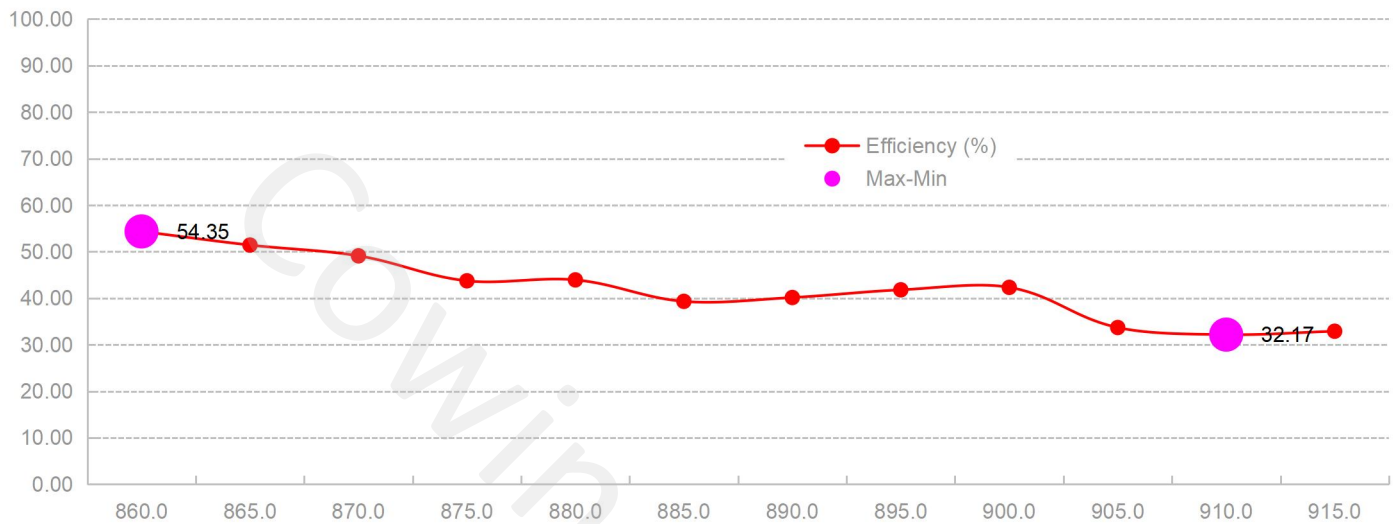


4.3 Peak gain


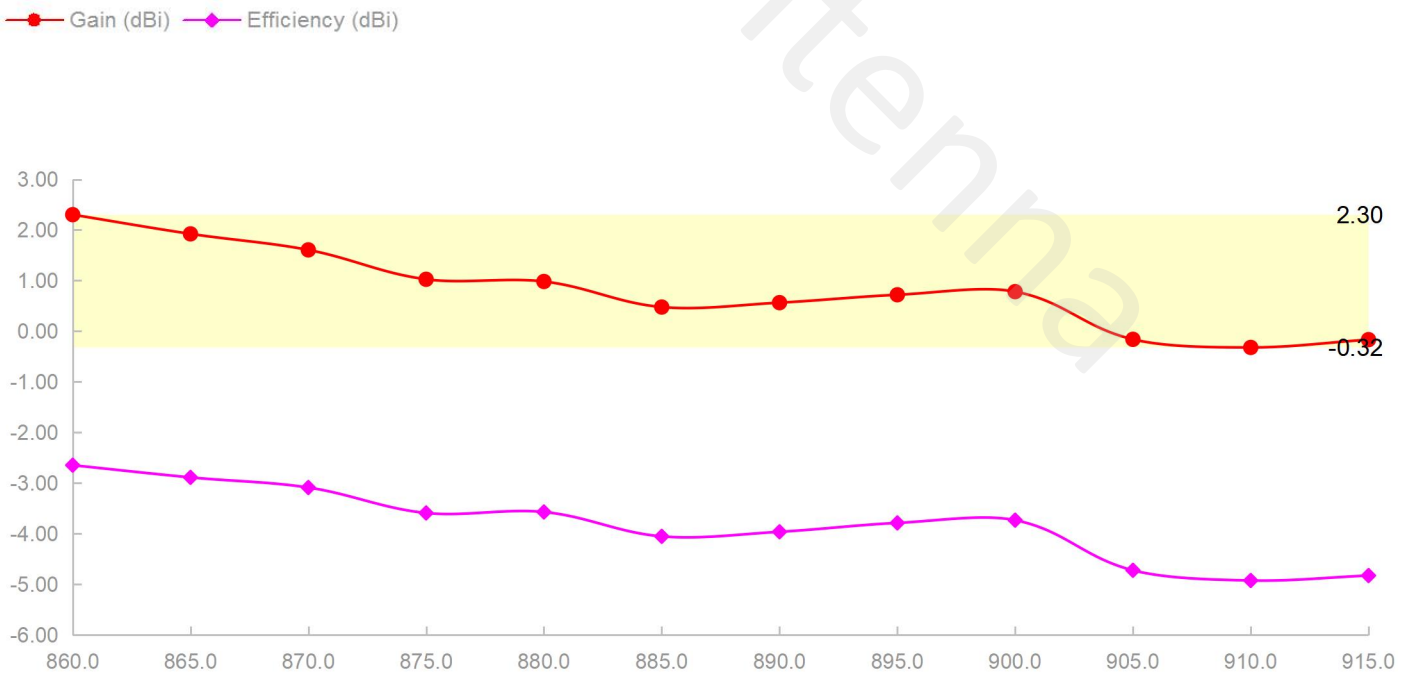


4.4 3D&2D Radiation Patterns


865.0MHz H+V, Eff: 51.4%

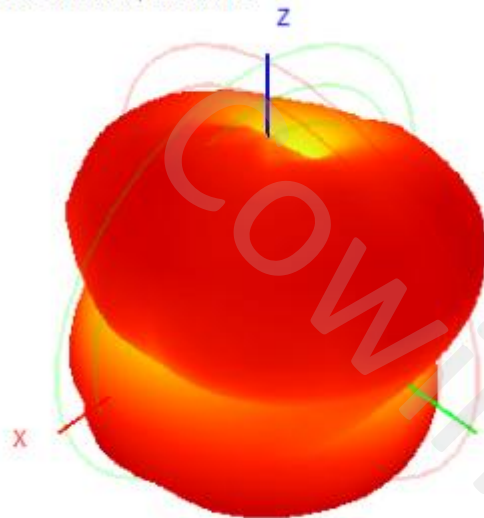


Back View

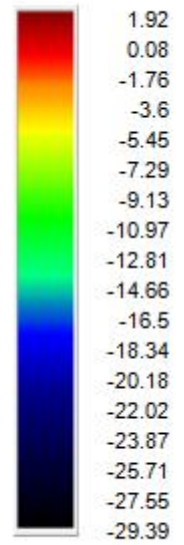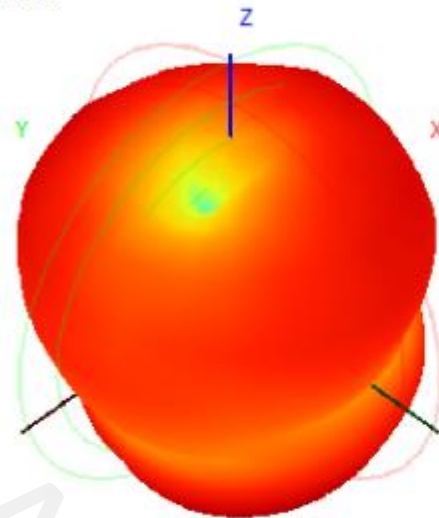

865.0MHz Total(E1-XZ), Max= 0.30dBi



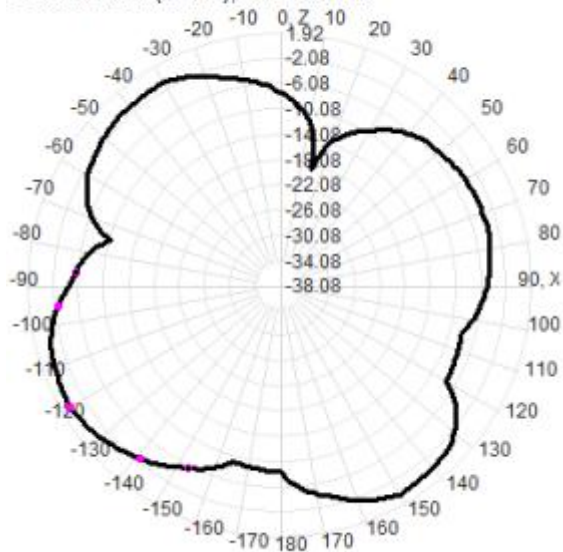


865.0MHz Total(E2-YZ), Max= 1.92dBi

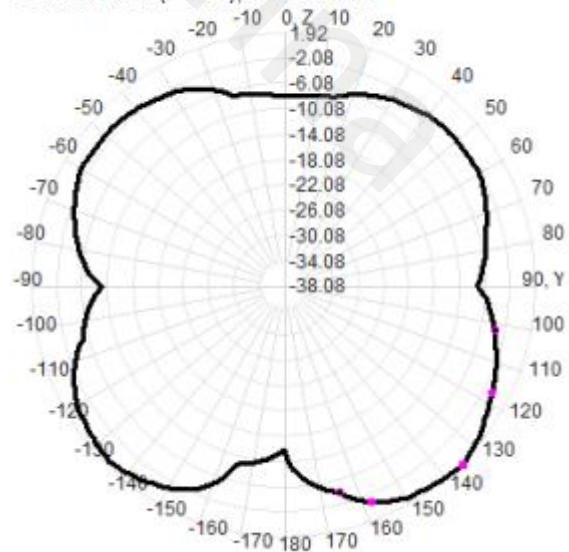



895.0MHz H+V, Eff: 41.8%

Back View

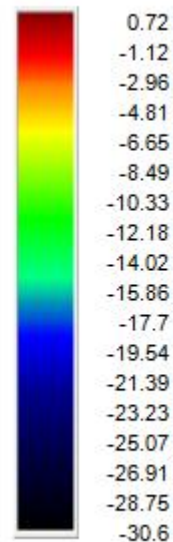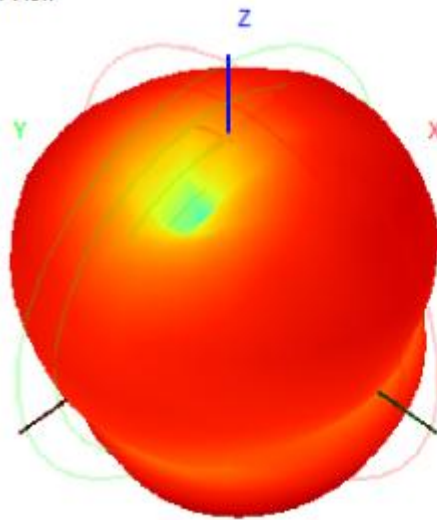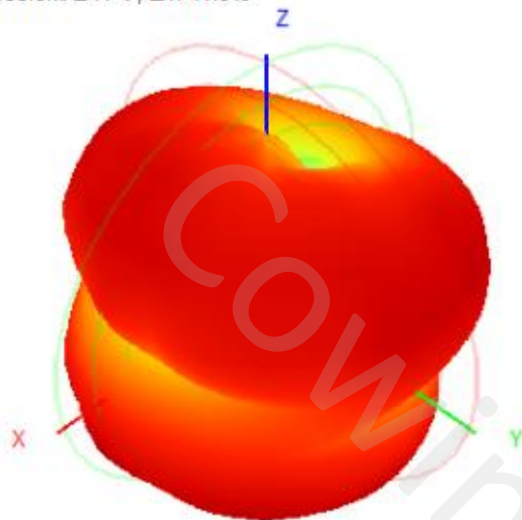




895.0MHz Total(E1-XZ), Max=-0.62dBi

895.0MHz Total(E2-YZ), Max=0.72dBi

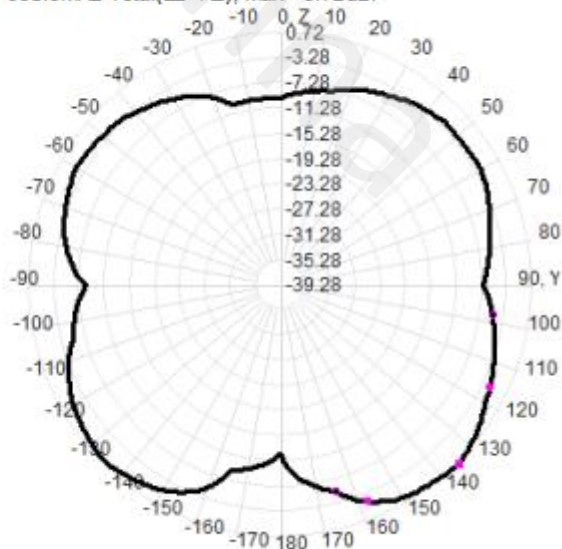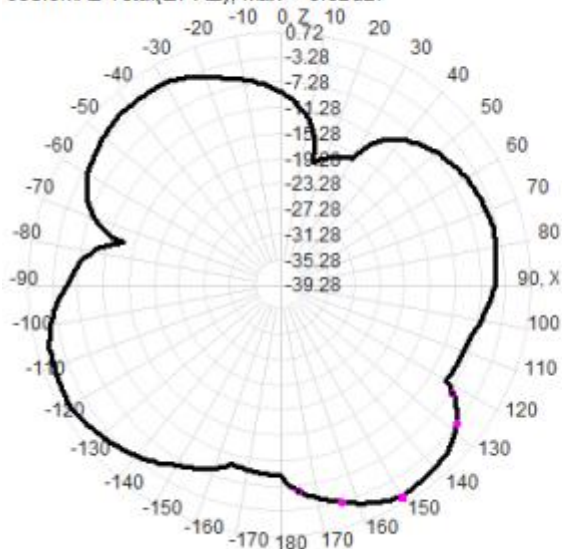


915.0MHz H+V, Eff: 32.9%

Back View

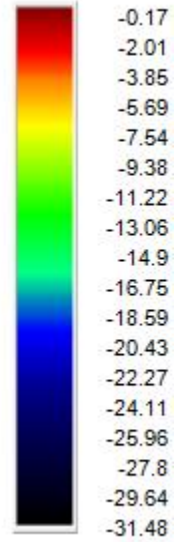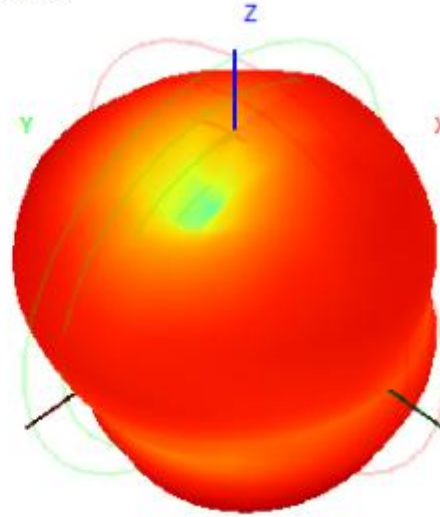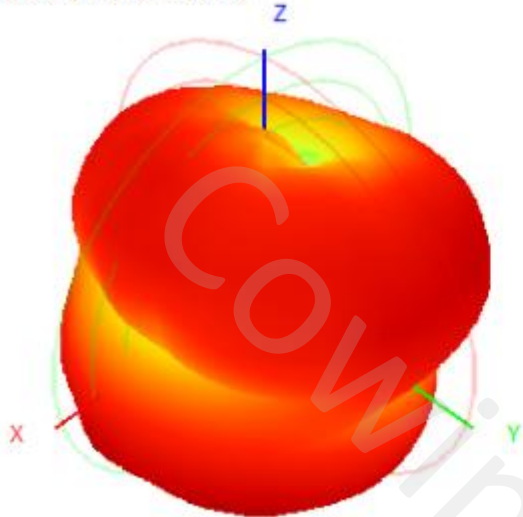

915.0MHz Total(E1-XZ), Max= -1.43dBi

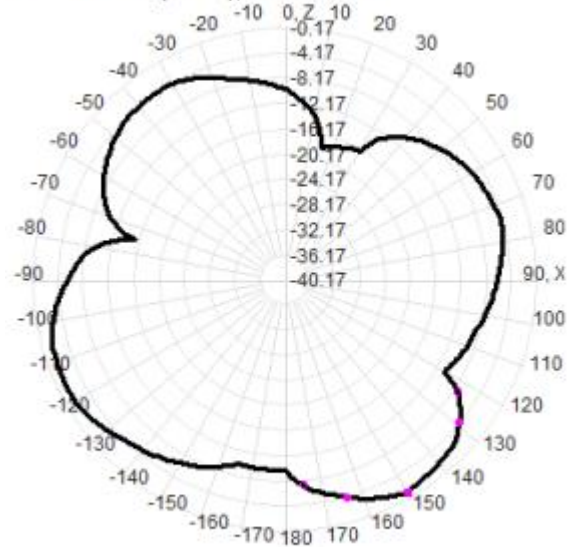

915.0MHz Total(E2-YZ), Max= -0.17dBi

